Technical data	Regular - size 1	Large - size 2				
	Regular - Size T	Large - Size z				
External Dimensions (mm):	38.9 x 24.9	41.9 x 30.4				
Thickness (mm)	5.3	5.7				
Pixel Matrix:	1500 x 1000	1700 x 1300				
Pixel size (µm):	20	20				
Maximum spatial resolution (lp/mm)	25	25				
Digital image bit depth	14 bit acquisition - 16384 maximum grey levels					
Scintillator technology	Csl (Caesium lodide) with micro-columnar structure					
Direct exposure protection	FOP (Fibre Optics Plate)					
Compatibility with X-ray generators	Any AC and DC technology X-ray generators with kV values in the					
	range 50 - 70 kV and with fine control of exposure times					

Minimum System Requirements

Supported Operating Systems PC interface Power supply Microsoft[®] Windows[®] 7 - Vista - XP Service Pack 2/3 Hi-Speed USB 5 VDC, 350 mA (USB)



Stabilimento / Plant Via Bicocca, 14/C 40026 Imola (BO) - Italy Tel. +39 0542 653441 Fax +39 0542 653601 **Sede Legale ed Amministrativa / Head Quarter** CEFLA s.c. - Via Selice Prov.le, 23/a 40026 Imola (BO) - Italy Tel. +39 0542 653111 Fax +39 0542 653344

castellini@castellini.com

www.castellini.com





Technology made comfortable

DIGITAL X-RAY SENSOR



DIGITAL X-RAY SENSOR **USB** CONNECTIVITY

Intraoral imaging made comfortable, at last

X-ViSUS has been developed to simplify the whole process of taking radiographs thanks to the outstanding ergonomic shape, which guarantees maximum patient comfort. The smooth sensor edges and the chamfered corners follow the anatomical shape of the oral cavity, simplifying sensor positioning.


Rounded corners

Thin profile



Two sizes available

X-ViSUS is available in two sizes, so you can chose the one that better suits your needs. X-ViSUS control box features hot-swap sensor connector, to work fast and safe with both sensors. Specific aiming devices are designed for both sizes to facilitate intraoral positioning.

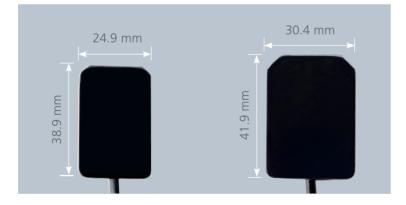



Easy, Fast, Mobile

Powerful USB connectivity makes system extraordinarily convenient and mobile. No unwieldy power source attachments, thanks to low power requirements sourced directly from the USB port.

The pocketsize control box move from room to room and desktop to laptop with ease.

X-ViSUS is USB 2.0 compatible, thus minimizing the time from the X-ray exposure to the image appearance on computer screen.

Accuracy, whichever way vou look at it

When it comes to diagnosis, images are not enough. It is essential that those images are accurate and clear. X-ViSUS features a highly sophisticated three-layer sensor, capable of high resolution image acquisition at minimal exposure dosage.

Shape of the active area, with profiled frontal corners, which allows for optimized outer casing.

Three-layer Sensor Technology

State-of-the-art X-ray image acquisition. Made of three different layers encapsulated in a protective shell, each layer contributes to final image quality.

Csl

This Caesium lodide scintillator is the first one to intercept the X-ray beam converting it into visible light. It is manufactured with a vertical growth process that generates a columnar microstructure, which grants unsurpassed image quality.

FOP

This Fibre Optics Plate protects the sensor from direct X-ray penetration, allowing years of use without image deterioration. Moreover, the vertical fibres preserve the image resolution while the light propagates through the three layers in the sensor.

CMOS

This is the acquisition device. It converts the light into a digital image. It's the latest generation of digital receptors, with cells of 20µm and 14bit encoding, capable of 16384 gray shades, way above your intraoral imaging needs. So you can be sure no detail is missed.


The Digital Way

Save time and costs. Reduce X-ray exposure. Enhance, share, store your X-ray images easily, thanks to the treatment software. Work with existing X-ray generators. Improve your diagnostics with superior images with no chemicals, no waiting, and no duplication hassles.

Going digital is no longer an option, because it helps you work more efficiently.

X-ViSUS is intraoral X-ray technology made simple, so nothing else stands in the way between you and the digital choice. Better workflow, better care.




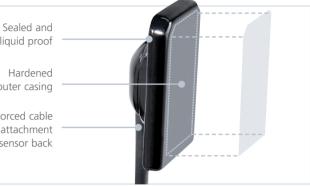

liquid proof

outer casing

Reinforced cable attachment on sensor back




Sensor with FOP

CMOS

CMOS

	4	₩.	1	i.		
	-	\mathbf{v}_{i}		ale.		
		-5.2-	4.00			



Sensor without FOP

	14	40	34	2.4		
4	æ			<u>,</u>	21	
1	÷4		1		1	
100	32	<u>.</u>	テレ 行物	2		
		522	20.0	N.		

